10/525576

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (1

(19) World Intellectual Property Organization

International Bureau



(43) International Publication Date 11 March 2004 (11.03.2004)

PCT

(10) International Publication Number WO 2004/021388 A1

(51) International Patent Classification7:

H01J 29/07

(21) International Application Number:

PCT/IB2003/003715

(22) International Filing Date: 31 July 2003 (31.07.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 02078533.3

28 August 2002 (28.08.2002)

- (71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): HUYSMANS, Ludovic, P., W. [BE/BE]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). SIMKENS, Franciscus, H., J. [NL/NL]; c/o Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).
- (74) Agent: DEGUELLE, Wilhelmus, H., G.; Philips Intellectual Property & Standards, Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).


- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA. UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM. KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:

as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,

[Continued on next page]

(54) Title: FRAME SECTION FOR A CATHODE RAY TUBE

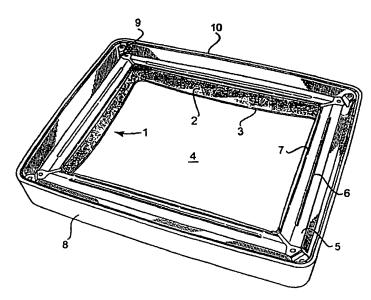

(57) Abstract: The present invention relates to a frame section (1) and a method for uncoupling at least a part of a reinforcing flange (5) from the rest of the frame section, a shadow mask frame and a shadow mask (4) in a cathode ray tube. The shadow mask frame is composed of at least four frame sections arranged in a hollow, generally rectangular shape, and each frame section includes two flange portions (2, 5) of a thin-walled material arranged at an angle to each other. A first flange portion serves as a mask mounting flange (2) the width of which extends generally in parallel with the cathode rays, and a second flange portion serves as a reinforcing flange (5) whose width extends generally perpendicularly to the cathode rays. According to the invention, a through-slit (6) is formed in the longitudinal direction of the frame section.

